

4



3

2

1

THIS DRAWING UNPUBLISHED.	RELEASED FOR PUBUCATION
---------------------------	-------------------------

LOC	DIST	REVISIONS					
---	---	P	LTR		DATE	DWN	APVD
			---	---	---	---	---

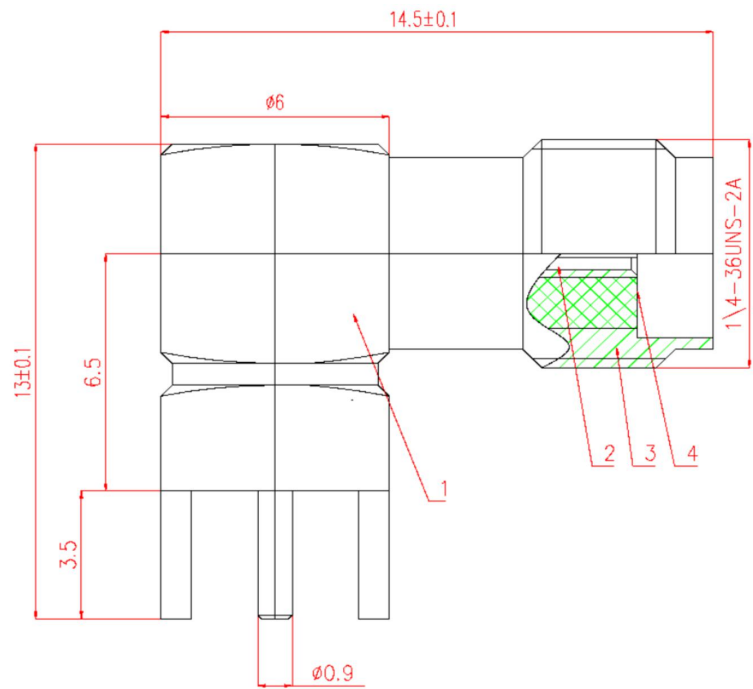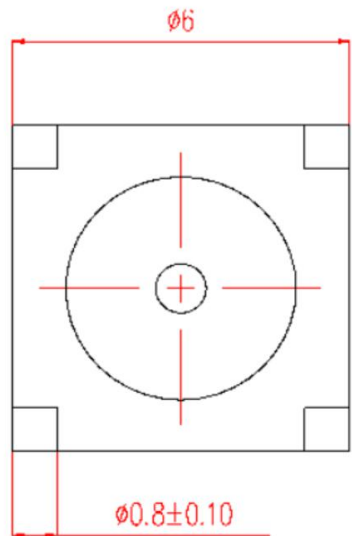

- NOTES:
- ELECTRICAL:
    - IMPEDANCE: 50Ω
    - INSULATION RESISTANCE: 5000M Ω
    - FREQUENCY RANGE: DC-6 GHz
    - DIELECTRIC WITHSTANDING VOLTAGE: 750V MAX AT SEA LEVEL
    - VSWR: ≤1.20:1
    - INSERTION LOSS: 0.25dB (MAX)
  - ENVIRONMENTAL:
    - TEMPERATURE RANGE: -55° to +125°
  - MATERIAL AND FINISH:
    - INNER CONDUCTOR MATERIAL: BERYLLIUM BRONZE GOLD PLATING
    - INSULATOR: PTFE
    - EXTERNAL CONDUCTOR MATERIAL: BRASS GOLD PLATING

1	2	3	4
BRASS	BERYLLIUM BRONZE	BRASS	PTFE
GOLD PLATING	GOLD PLATING	GOLD PLATING	/
Accept custom sizes and styles			

- ENVIRONMENTAL:
  - TEMPERATURE RANGE: -55° to +125°
- MATERIAL AND FINISH:
  - INNER CONDUCTOR MATERIAL: BERYLLIUM BRONZE GOLD PLATING
  - INSULATOR: PTFE
  - EXTERNAL CONDUCTOR MATERIAL: BRASS GOLD PLATING

THIS DRAWING IS A CONTROLLED DOCUMENT		21/10/2021	 Shenzhen xinqiyuan Technology Co., Ltd.												
		CHK													
DIMENSIONSMM		TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.1	NAME SSMA Female RF Coaxial Connector Printed circuit board												
		Note: Dimensions (mm / [inch])	<table border="1"> <tr> <td>APVD</td> <td>SIZE A4</td> <td>CAGE CODE 01021</td> <td>DRAWING NO XQY-SSMAKWE-TB</td> </tr> <tr> <td>APPLICATION SPEC</td> <td></td> <td></td> <td></td> </tr> <tr> <td>WEIGHT</td> <td></td> <td></td> <td></td> </tr> </table>	APVD	SIZE A4	CAGE CODE 01021	DRAWING NO XQY-SSMAKWE-TB	APPLICATION SPEC				WEIGHT			
APVD	SIZE A4	CAGE CODE 01021	DRAWING NO XQY-SSMAKWE-TB												
APPLICATION SPEC															
WEIGHT															

4

3

2

1